



WRD3K410

If, Average Forward Current (A)

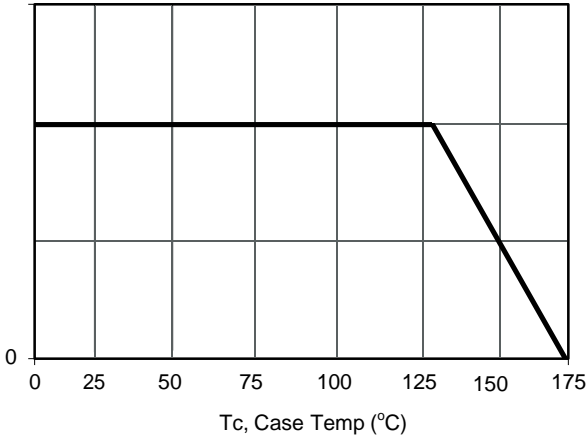


Current Derating, Case

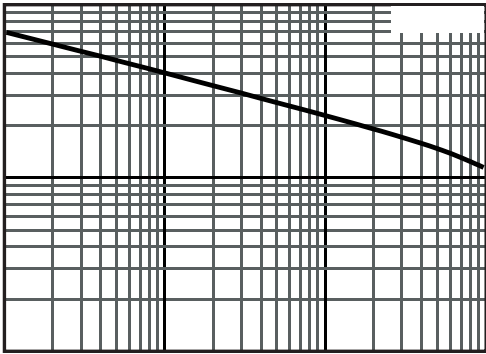

Typical Junction Capacitance

If, Instantaneous Forward Current (A)

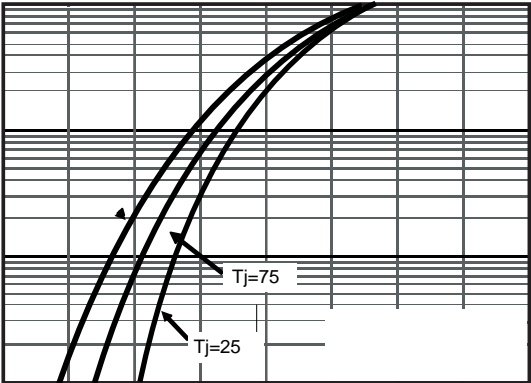


Vf, Instantaneous Forward Voltage (V)

Typical Forward Voltage

VR, Reverse Voltage (Volts)

Typical Reverse Current

WRD3K410

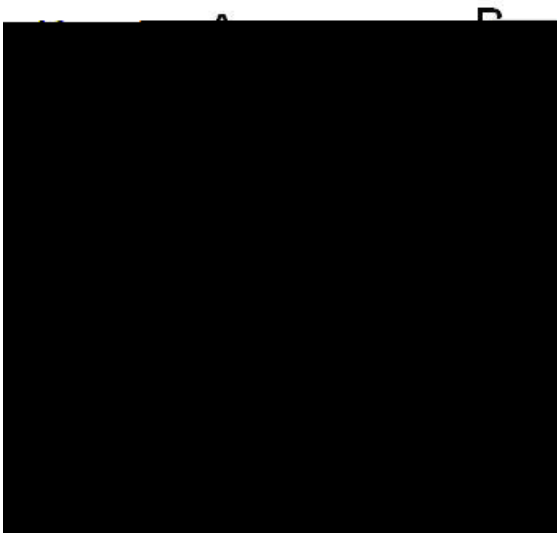

D3K		
Dim.	Min.	Max.
A	14.2	14.7
B	3.30	3.60
C	10.2	10.6
D	13.8	14.4
E	1.8	2.2
F	6.65	7.25
G	3.71	3.91
H	0.3	0.55
I	1.22	1.42
J	0.76	0.86
O	1.8	2.4
P	3.0Φ	3.4Φ
All Dimensions in millimeter		

