

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA 9



Cathode \leftarrow Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGDWDJH GURS
- ‡ /RZRZURVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHS SOLHV
- ‡)UHHZKHHLRQJ



Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXSHVSHUNYHYURQWDJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUUHQW VLQDQHQZDYH VXSHULPSQNDVGRSGLRGH		,) 60		\$
2SHUDMXQEDVLRQWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFVQCHUPDO USHVUVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRDUZDUG SHGLRGH	,) \$	7- f&	7 < 3	0\$;
	,) \$	7- f&		
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHQHRCVH UDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$

1RWHV


3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOVH ZLGWK 0

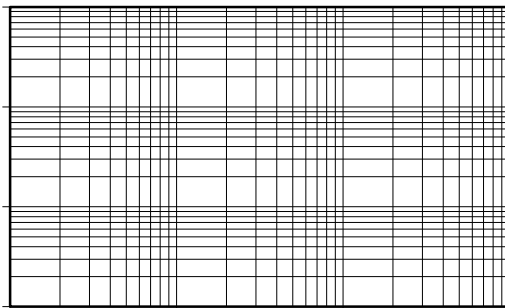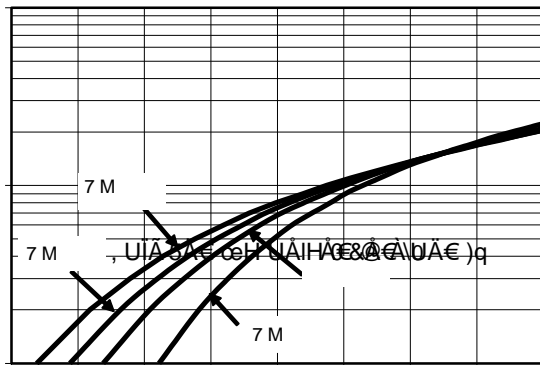

PACKAGE OUTLINE DIMENSIONS

DO-201AD

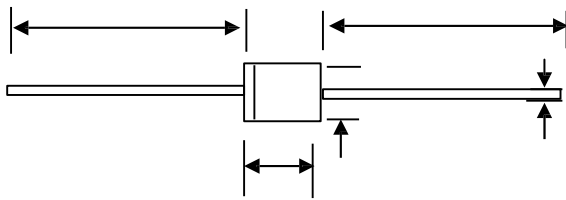


DO-201AD mechanical data

UNIT		A	B	C	D
mm	max	26.5	9.5	1.4	5.3
	min	24.5	7.3	1.1	4.8
mil	max	1043.30	374.01	5.1	208.67
	min	946.57	287.40		188.97

0DUNLQJ ,QIRUPDWLRQ


Cathode



\$QRGH

73URGXFW PQRGH


83' & LQIRUPDWLRQ

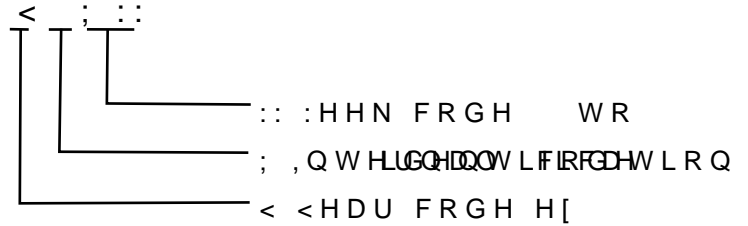

DWU] b[' =bZcf aUh] cb

% =bg] XY 6cl

&' G hg] XY 6cl

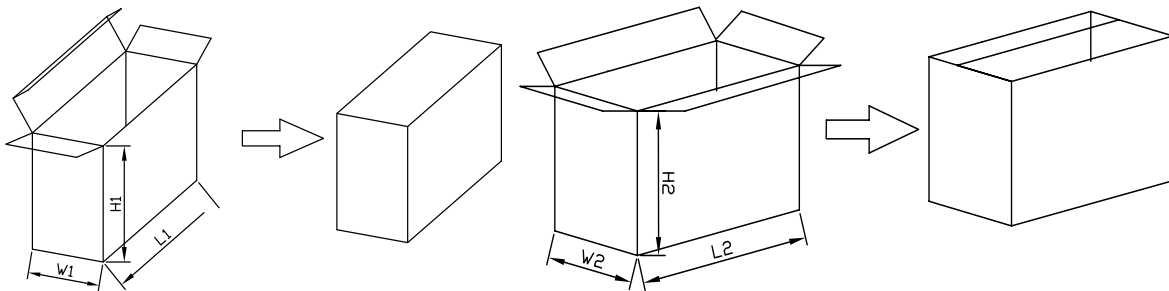

DWU] b[' =bZcf aUh] cb

BC	I B=H	=bg] XY6cl			G hg] XY 6cl		
G] nY	aa	@%	K%	<%	@&	K&	<&
		&)	+))	%4Í	4FÍ	Gì€	HG€
ÛVŸ	ÛÔÙ	Ù { æ ^•c h} æ& \æ* ^ÉF€€€ÙÔÙD&æ;c [} Á			F€€€€ÙÔÙD&æ;c [} ÉF€à [ç^•há } Ác [cæ]		
P [c^	V [^iæ]&^	mG€ { { É†H { { L GFÉF€€ { { É†Í { { L			F€FÉí€€ { { É†F€ { {		