



76\$ /

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA /



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGHLQLVK &RPSOLDQW

Applications

- ‡ '&' &RQYHUWHUV
- ‡ \$&'&GDSWRUV
- ‡ 6ZLWFKRZHS SOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXSHVSHUNYHYURQWDJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLKDOHQZDYH VXSHULPSRQDWHGRSGLRGH		,) 60	5	\$
2SHUDMXQEDQGRWRUDJH WHPSHUDW		X0H767°C JH	0WR50	f &
7\SLFDO WIKHULPBDQFH	'2 \$'	5\$-&		f & :
,QVWDQWDQHRROWRDUG SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQWRCWH UDWHYHYURQWDJH	7- f &	,5		X\$
	7- f &			X\$

1RWHV


3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPWH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES


7\$

f & XQOHVQRWKBUZLVH

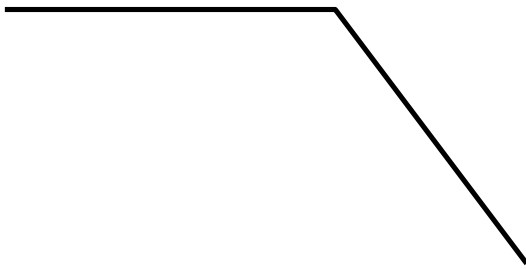


7F & DVH 7&HPS

3 HD)NR UZ D6UXGJ BXUUHQW

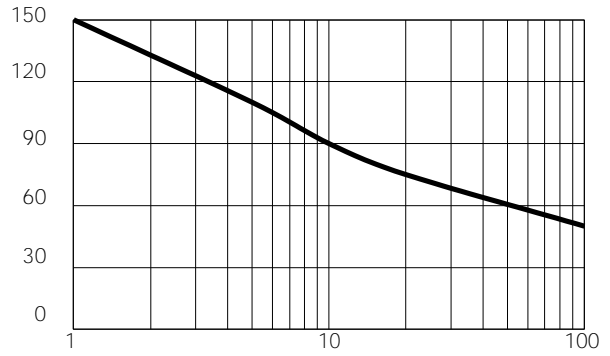

1REU RI&OHV DW }

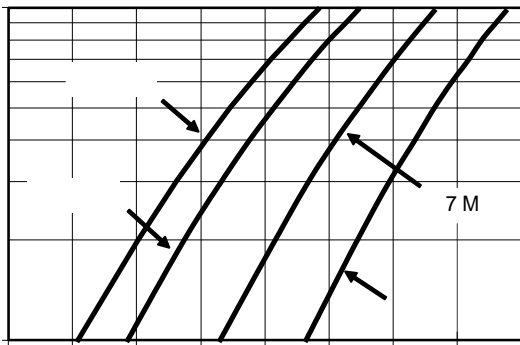


91 ,QVWDQWDQHRXV)RUZDUG 9ROWDJH P9 95 5HYHUVH 9ROWDJH 9ROWV



PACKAGE OUTLINE DIMENSIONS


DO-201AD

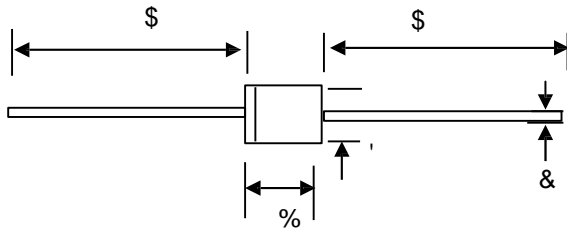


'2 \$' PHFKD QLFWD

	\$	%		
PP			4	
			1	
PLO				


Marking Information



3URGXFW 76\$ HO
 3' & LQIRUPDWLRQ

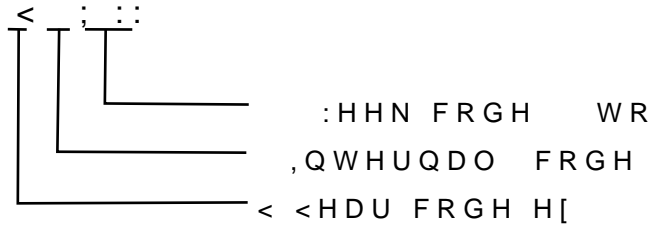

Packaging Information

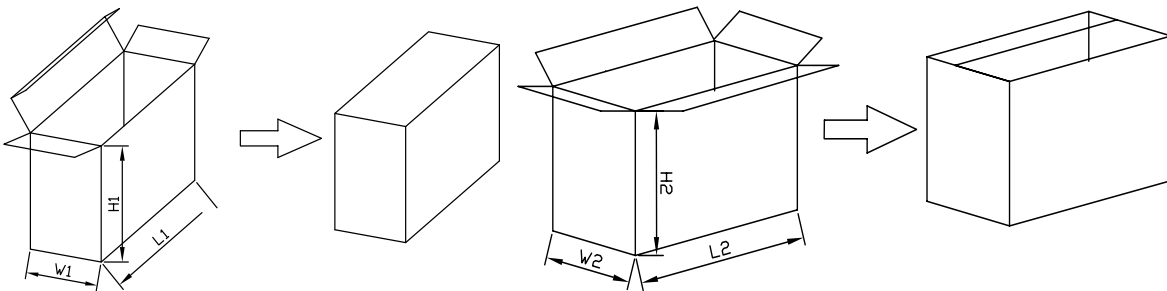

Packaging Information



ö